

FortiGate FortiWiFi 40F Series

FG-40F, FG-40F-3G4G, FWF-40F, FWF-40F-3G4G



Highlights

Gartner Magic Quadrant Leader for both Network Firewalls and SD-WAN.

Security-Driven Networking with FortiOS delivers converged networking and security.

Unparalleled Performance with Fortinet's patented SoC processors.

Enterprise Security

with consolidated AI / ML-powered FortiGuard Services.

Simplified Operations

with centralized management for networking and security, automation, deep analytics, and self-healing.

Converged Next-Generation Firewall (NGFW) and SD-WAN

The FortiGate Next-Generation Firewall 40F series is ideal for building security-driven networks at distributed enterprise sites and transforming WAN architecture at any scale.

With a rich set of Al/ML-based FortiGuard security services and our integrated Security Fabric platform, the FortiGate FortiWiFi 40F series delivers coordinated, automated, end-to-end threat protection across all use cases.

FortiGate has the industry's first integrated SD-WAN and zero-trust network access (ZTNA) enforcement within an NGFW solution and is powered by one OS. FortiGate 40F automatically controls, verifies, and facilitates user access to applications, delivering consistency with a seamless and optimized user experience.

IPS	NGFW	Threat Protection	Interfaces
1 Gbps	800 Mbps	600 Mbps	Multiple GE RJ45 WiFi variants



Available in



Appliance



Virtual





Cloud



Container

FortiOS Everywhere

FortiOS, Fortinet's Advanced Operating System

FortiOS enables the convergence of high performing networking and security across the Fortinet Security Fabric. Because it can be deployed anywhere, it delivers consistent and context-aware security posture across network, endpoint, and multi-cloud environments.

FortiOS powers all FortiGate deployments whether a physical or virtual device, as a container, or as a cloud service. This universal deployment model enables the consolidation of many technologies and use cases into organically built best-of-breed capabilities, unified operating system, and ultra-scalability. The solution allows organizations to protect all edges, simplify operations, and run their business without compromising performance or protection.

FortiOS dramatically expands the Fortinet Security Fabric's ability to deliver advanced AI/MLpowered services, inline advanced sandbox detection, integrated ZTNA enforcement, and more. It provides protection across hybrid deployment models for hardware, software, and Software-as-a-Service with SASE.

FortiOS expands visibility and control, ensures the consistent deployment and enforcement of a simplified, single policy and management framework. Its security policies enable centralized management across large-scale networks with the following key attributes:

- Interactive drill-down and topology viewers that display real-time status
- On-click remediation that provides accurate and quick protection against threats and abuses
- Unique threat score system correlates weighted threats with users to prioritize investigations





Intuitive easy to use view into the network and endpoint vulnerabilities

Visibility with FOS Application Signatures

FortiConverter Service

FortiConverter Service provides hassle-free migration to help organizations transition from a wide range of legacy firewalls to FortiGate Next-Generation Firewalls quickly and easily. The service eliminates errors and redundancy by employing best practices with advanced methodologies and automated processes. Organizations can accelerate their network protection with the latest FortiOS technology.



FortiGuard Services

Network and File Security

Services provide protection against network-based and file-based threats. This consists of Intrusion Prevention (IPS) which uses AI/M models to perform deep packet/SSL inspection to detect and stop malicious content, and apply virtual patching when a new vulnerability is discovered. It also includes Anti-Malware for defense against known and unknown file-based threats. Anti-malware services span both antivirus and file sandboxing to provide multilayered protection and are enhanced in real-time with threat intelligence from FortiGuard Labs. Application Control enhances security compliance and offers real-time application visibility.

Web / DNS Security

Services provide protection against web-based threats including DNS-based threats, malicious URLs (including even in emails), and botnet/command and control communications. DNS filtering provides full visibility into DNS traffic while blocking high-risk domains, and protects against DNS tunneling, DNS infiltration, C2 server ID and Domain Generation Algorithms (DGA). URL filtering leverages a database of 300M+ URLs to identify and block links to malicious sites and payloads. IP Reputation and anti-botnet services prevent botnet communications, and block DDoS attacks from known sources.

SaaS and Data Security

Services address numerous security use cases across application usage as well as overall data security. This consists of Data Leak Prevention (DLP) which ensures data visibility, management and protection (including blocking exfiltration) across networks, clouds, and users, while simplifying compliance and privacy implementations. Separately, our Inline Cloud Access Security Broker (CASB) service protects data in motion, at rest, and in the cloud. The service enforces major compliance standards and manages account, user and cloud application usage. Services also include capabilities designed to continually assess your infrastructure, validate that configurations are working effectively and secure, and generate awareness of risks and vulnerabilities that could impact business operations. This includes coverage across IoT devices for both IoT detection and IoT vulnerability correlation.

Zero-Day Threat Prevention

Zero-day threat prevention entails Fortinet's AI-based inline malware prevention, our most advanced sandbox service, to analyze and block unknown files in real-time, offering subsecond protection against zero-day and sophisticated threats across all NGFWs. The service also has a built-in MITRE ATT&CK® matrix to accelerate investigations. The service focuses on comprehensive defense by blocking unknown threats while streamlining incident response efforts and reducing security overhead.

OT Security

The service provides OT detection, OT vulnerability correlation, virtual patching, OT signatures, and industry-specific protocol decoders for overall robust defense of OT environments and devices.



Secure Any Edge at Any Scale

Powered by Security Processing Unit (SPU)

Traditional firewalls cannot protect against today's content- and connection-based threats because they rely on off-the-shelf hardware and general-purpose CPUs, causing a dangerous performance gap. Fortinet's custom SPU processors deliver the power you need—up to 520Gbps—to detect emerging threats and block malicious content while ensuring your network security solution does not become a performance bottleneck.

ASIC Advantage



Secure SD-WAN ASIC SOC4

- Combines a RISC-based CPU with Fortinet's proprietary Security Processing Unit (SPU) content and network processors for unmatched performance
- Delivers industry's fastest application identification and steering for efficient business operations
- Accelerates IPsec VPN performance for best user experience on direct internet access
- Enables best of breed NGFW Security and Deep SSL Inspection with high performance
- Extends security to access layer to enable SD-Branch transformation with accelerated and integrated switch and access point connectivity



FortiCare Services

Fortinet is dedicated to helping our customers succeed, and every year FortiCare Services help thousands of organizations get the most from our Fortinet Security Fabric solution. Our lifecycle portfolio offers Design, Deploy, Operate, Optimize, and Evolve services. Operate services offer device-level FortiCare Elite service with enhanced SLAs to meet our customer's operational and availability needs. In addition, our customized account-level services provide rapid incident resolution and offer proactive care to maximize the security and performance of Fortinet deployments.

Use Cases

Next Generation Firewall (NGFW)

- FortiGuard Labs' suite of Al-powered Security Services—natively integrated with your NGFW—secures web, content, and devices and protects networks from ransomware and sophisticated cyberattacks
- Real-time SSL inspection (including TLS 1.3) provides full visibility into users, devices, and applications across the attack surface
- Fortinet's patented SPU (Security Processing Unit) technology provides industry-leading high-performance protection




Secure SD-WAN

- FortiGate WAN Edge powered by one OS and unified security and management framework and systems transforms and secures WANs
- Delivers superior quality of experience and effective security posture for work-from-any where models, SD-Branch, and cloud-first WAN use cases
- Achieve operational efficiencies at any scale through automation, deep analytics, and self-healing




Universal ZTNA

- Control access to applications no matter where the user is and no matter where the application is hosted for universal application of access policies
- Provide extensive authentications, checks, and enforce policy prior to granting application access every time
- Agent-based access with FortiClient or agentless access via proxy portal for guest or BYOD




Hardware

FortiGate FortiWifi 40F Series

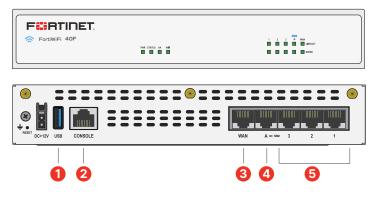

FortiGate FortiWifi 40F-3G4G

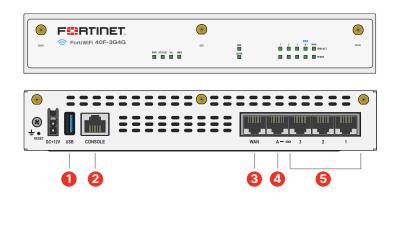

Interfaces

- 1. 1 x USB Port
- 2. 1 x Console Port
- 3. 1 x GE RJ45 WAN Port
- 4. 1 x GE RJ45 FortiLink Port
- 5. 3 x GE RJ45 Ethernet Ports

Hardware Features



Interfaces

- 1. 1 x USB Port
- 2. 1 x Console Port
- 3. 1 x GE RJ45 WAN Port
- 4. 1 x GE RJ45 FortiLink Port
- 5. 3 x GE RJ45 Ethernet Ports

Hardware Features



Compact and Reliable Form Factor

Designed for small environments, you can place it on a desktop or wall-mount it. It is small, lightweight, yet highly reliable with a superior MTBF (Mean Time Between Failure), minimizing the chance of a network disruption.

Access Layer Security

FortiLink protocol enables you to converge security and the network access by integrating the FortiSwitch into the FortiGate as a logical extension of the NGFW. These FortiLink enabled ports can be reconfigured as regular ports as needed.

Specifications

	FORTIGATE 40F	FORTIWIFI 40F	FORTIGATE 40F-3G4G	FORTIWIFI 40F-3G4G	
Interfaces and Modules					
Hardware Accelerated GE RJ45 WAN / DMZ Ports	1	1	1	1	
Hardware Accelerated GE RJ45 Internal Ports	3	3	3	3	
Hardware Accelerated GE RJ45 FortiLink Ports (Default)	1	1	1	1	
Hardware Accelerated GE RJ45 PoE/+ Ports	0	0	0	0	
Cellular Modem	-	-	3G4G LTE	3G4G LTE	
Wireless Interface	0	Single Radio (2.4GHz/5GHz) 802.11 /a/b/g/n/ac-W2	0	Single Radio (2.4GHz/5GHz), 802.11 a/b/g/n/ac-W2	
Antenna Ports (SMA)	0	3	3	6	
USB Ports	1	1	1	1	
Console Port (RJ45)	1	1	1	1	
SIM Slots (Nano SIM)	0	0	2	2	
Onboard Storage	0	0	0	0	
Included Transceivers	0	0	0	0	
System Performance — Enterprise Traffic Mix					
IPS Throughput ²		1 G	bps		
NGFW Throughput ^{2,4}		800	Mbps		
Threat Protection Throughput ^{2, 5}		600	Mbps		
System Performance and Capacity					
IPv4 Firewall Throughput (1518 / 512 / 64 byte, UDP)		5 / 5 /	5 Gbps		
Firewall Latency (64 byte, UDP)		2.97 µs			
Firewall Throughput (Packet per Second)	7.5 Mpps				
Concurrent Sessions (TCP)	700 000				
New Sessions/Second (TCP)		35	000		
Firewall Policies		50	000		
IPsec VPN Throughput (512 byte) ¹	4.4 Gbps				
Gateway-to-Gateway IPsec VPN Tunnels	200				
Client-to-Gateway IPsec VPN Tunnels		2	50		
SSL-VPN Throughput		490	Mbps		
Concurrent SSL-VPN Users (Recommended Maximum, Tunnel Mode)		2	00		
SSL Inspection Throughput (IPS, avg. HTTPS) ³		310	Mbps		
SSL Inspection CPS (IPS, avg. HTTPS) ³		3	20		
SSL Inspection Concurrent Session (IPS, avg. HTTPS) ³					
Application Control Throughput (HTTP 64K) ²		990	Mbps		
CAPWAP Throughput (HTTP 64K)		3.5			
Virtual Domains (Default / Maximum)		10 / 10			
Maximum Number of FortiSwitches Supported		8			
Maximum Number of FortiAPs (Total / Tunnel)	16 / 8				
Maximum Number of FortiTokens		5	00		
High Availability Configurations		Active-Active, Activ	e-Passive, Clustering		

Note: All performance values are "up to" and vary depending on system configuration.

¹ IPsec VPN performance test uses AES256-SHA256.

 $^{\rm 2}$ IPS (Enterprise Mix), Application Control, NGFW and Threat Protection are measured with Logging enabled.

³ SSL Inspection performance values use an average of HTTPS sessions of different cipher suites.

 $^{\scriptscriptstyle 4}$ NGFW performance is measured with Firewall, IPS and Application Control enabled.

⁵ Threat Protection performance is measured with Firewall, IPS, Application Control and Malware Protection enabled.

Specifications

Dinestion and PowerHight X Mith Length (mice)15 k 5 k 3 k 10Hight X Mith Length (mice)2.2 los (1 k)Right X M		FORTIGATE 40F	FORTIWIFI 40F	FORTIGATE 40F-3G4G	FORTIWIFI 40F-3G4G		
Height x Width x Length (xm) 38.5 × 216 × 160 40.5 × 216 × 160 Weight 2.2 bu (t kg) 2.2 bu (t kg) Form Factor (supported by External DC power Adgour, Input Rating 100-2 AdV CS, 5000 FL2 TaVice, 3A TaVice, 3A Power Required ?2 bu (t Ag) 100 × 20 × 20 × 20 × 20 × 20 × 20 × 20 ×	Dimensions and Power						
Weight2.2 kb (Hg)2.2 kb (Hg)2.2 kb (Hg)Form Factor regerer factor regover factor regover factor regover factor regover factor regover factor regover factor regover factor regover factor 	Height x Width x Length (inches)	1.5 × 8.5 × 6.3		1.6 × 8.5 × 6.3			
Form Factor (support EL/Annal LC) (support EL/Annal LC) (support EL/Annal LC) (boxed by External	Height x Width x Length (mm)	38.5 ×	216 × 160	40.5 × 2	40.5 × 216 × 160		
(stupper ERAnon-ERA standards) 12/vdc, 3A 12/vdc, 3A Power Reguind 12/vdc, 3A 20/vdc, 36/vdc, 12/vdc, 34 Power Reguind 100×26/vdc, 50/k0 1/r 100×26/vdc, 50/k0 1/r Current (Maximum) 100v AC / 0.2A, 24/vdc, 50/k0 1/r 100×26/vdc, 50/k0 1/r Power Reguind 32/v5/06 1/r 100×26/vdc, 50/k0 1/r Power Reguind 50.64 8 U/t 18.6W 15.8 W/18.6W 18.6 W/18.8W Power Reguind 52.55 8 TU/h 56.64 8 U/t 18.6W 56.64 8 U/t 18.6W 18.6 W/18.6W 1	Weight	2.2 lt	os (1 kg)	2.2 lbs (1 kg)			
Power Required Powered by External DC Power Adapter, to0-2407 AC, 5000 Hz Powered by external DC power adapter to0-2407 AC, 5000 Hz Corrent (Maxinum) 100 VAC (02A, 240 VAC /01A 100 VAC (03A, 240 VAC /500 Power Required 528 BTU/n 56.64 BTU/n 63.5 BTU/n 67.6 BTU/n Power Required 525.5 BTU/n 56.64 BTU/n 63.5 BTU/n 67.6 BTU/n Operating Tenvironment and Certifications 525.5 BTU/n 56.64 BTU/n 63.5 BTU/n 67.6 BTU/n Operating Tenvironment and Certifications 52.52 BTU/n 56.64 BTU/n 63.5 BTU/n 67.6 BTU/n Operating Tenvironment and Certifications 52.52 BTU/n 56.7 CES, CE, ROM, VCCI, BSMI, UL/UL, CB 34.3 Statt 35.8 Statt 36.8 Statt 36.8 Statt 36		De	sktop	Des	Desktop		
Tob-240V AC, S0/00 Hz TOD 240V AC, S0/00 Hz Current Maximum 100V AC / S0.2A, 240V AC / O.1A 100V AC / S0.2A, 240V AC / O.2A Power Consumption (Reversige Maximum) 77.4 W / 9.4 BW 16.8 W / 18.8 W 16.8 W / 18.8 W Heat Dissipation Storage Tomperature 52.55 BTUM 63.5 BTUM 63.5 BTUM 67.6 BTUM Operating Environment and Certifications 52.55 BTUM 53.5 V/ 04.5 (%) 67.6 BTUM Storage Tomperature -31*-158F (-35*-70*C) - - Storage Tomperature -31*-158F (-35*-70*C) - - Operating Mittude -31*-158F (-35*-70*C) - - - Operating Mittude -31*-158F (-35*-70*C) - <th>Input Rating</th> <th colspan="3">12Vdc, 3A 12Vdc, 3A</th> <th>ic, 3A</th>	Input Rating	12Vdc, 3A 12Vdc, 3A			ic, 3A		
Prover Consumption Character View7.74 W / 8.46 W14.6 W / 18.6 W18.6 W / 18.6 W18.8 W / 18.6 WHead Dissipation52.55 BTU/n56.64 BTU/n63.5 BTU/n67.6 BTU/nOperating Environment and Certifications32*-104*F (0*-40*C)50.64 BTU/n67.6 BTU/nStorage Temperature-31*-158*F (-33*-70*C)10%-90% non-condensing10%-90% non-condensingNoise LevelFanless OtalCompliance10%-90% non-condensingComplianceUp to 7400 ft (2250 m)Compliance10%-90% non-condensingComplianceUSGY0/IPV6SGH2 (250 m)10% Otal (2250 m)CertificationsUSGY0/IPV6SGH2 (250 m)1300 Mbps @ 2.4 GH2Mutiple (MU) MMON/A3 × 3NA3 × 3Maximum XF: FSpeedsN/A1300 Mbps @ 2.4 GH2SGH2 (250 M)Mutiple Gui MMON/A3 5 dB @ 50H2, 5 dB @ 2.4 GH2SGH2 (250 M)Rationa CainN/A3 5 dB @ 50H2, 5 dB @ 2.4 GH2SGH2 (250 M)Rationa CainN/A3 5 dB @ 50H2, 5 dB @ 2.4 GH2SGH2 (250 M)Rationa CainN/A3 5 dB @ 50H2, 10 MA3 5 dB @ 2.4 GH2Rationa CainN/A3 5 dB @ 2.4 GH2SGH2 (250 M)Catal CappedN/A2 dBmSGH2 (250 M)Catal CappedN/AS dB @ 2.4 GH2SGH2 (250 M)Catal CappedN/A2 dBmSGH2 (250 M)Catal CappedN/AS dB @ 2.4 GH2SGH2 (250 M)Catal CappedN/AS dB @ 2.4 GH2SGH2 (250 M)Catal CappedN/A	Power Required						
(Averaige // Maximum)182 Stapper atureStapper ature <th col<="" th=""><th>Current (Maximum)</th><th>100V AC / 0.2</th><th>A, 240V AC / 0.1A</th><th colspan="3">100V AC / 0.3A, 240V AC / 0.2A</th></th>	<th>Current (Maximum)</th> <th>100V AC / 0.2</th> <th>A, 240V AC / 0.1A</th> <th colspan="3">100V AC / 0.3A, 240V AC / 0.2A</th>	Current (Maximum)	100V AC / 0.2	A, 240V AC / 0.1A	100V AC / 0.3A, 240V AC / 0.2A		
Operating Temperature 32x-104/# [0P-40/%] Storage Temperature 32x-104/# [0P-40/%] Storage Temperature -31*-158/# [-35%-70/%] Humidity 10%-90% non-condensing Noise Level Fanless 0 dBA Operating Altitude Up to 7400 ft (2250 m) Compliance CSC, ICES, CE, RCM, VCR, BSMI, UL/LUL, CB Certifications USGV6/IPV6 Mutiple (MU) MMO N/A 3 x 3 Maximum Wi-FI Speeds N/A 3 x 3 Maximum Wi-FI Speeds N/A 3 x 3 Maximum Tx Power N/A 2 0 dBm N/A 2 5 dBI @ 5 CH2, 450 Mbps @ 2.4 GH2 Regions N/A 2 0 dBm N/A 2 5 dBI @ 5 CH2, 450 Mbps @ 2.4 GH2 5 GH2, 450 Mbps @ 2.4 GH2 5 GH2 @ CH2 5 GH2, 450 Mbps @ 2.4 GH2 5 GH		7.74 W / 9.46 W	14.6 W / 16.6 W	15.8 W / 18.6 W	18.6 W / 19.8 W		
Operating Temperature 32°-104°F (0°-40°C) Storage Temperature -31°-158°F (-35°-70°C) Humidity 10%-90% on-condensing Noise Level Fanless 0 dBA Operating Altitude Up to 7400 ft (2250 m) Compliance FSC, CE, SC, KOM, VCCI, BSMI, UL/cUL, CB Cartifications Up to 7400 ft (2250 m) Cordifications Socie Level Multiple (MU) MIMO N/A 3 × 3 Maximum Wi-FI Speeds N/A 3 × 3 Maximum Wi-FI Speeds N/A 3 × 3 Maximum Wi-FI Speeds N/A 20 dBm Maximum Stream N/A 20 dBm Antenna Gain N/A 20 dBm N/A 20 dBm N/A 25 dBi @ 2.4 GHz Regional Compatibility Signal @ Schtz, Scht Mich @ Schtz	Heat Dissipation	52.55 BTU/h	56.64 BTU/h	63.5 BTU/h	67.6 BTU/h		
Storage Temperature	Operating Environment and Certifications						
Immidity 10%-90% non-condensing Noise Level Fanless 0 dBA Operating Altitude Up to 7400 ft (225 m) Compliance FGC, ICES, CE, RCM, VCCI, BSMI, UL/, CB Certifications USOv(R)/V Radio Specifications USOv(R)/V Multiple (MU) MIMO N/A 3 × 3 Maximum Wi-FI Speeds N/A 3 × 3 Maximum TX Power N/A 20 dBm N/A 20 dBm Antenna Gain N/A 20 dBm N/A 20 dBm Modem Model N/A 20 dBm S dBI @ 5 GHZ, 450 Mbps @ 2.4 GHZ S dBI @ 5 GHZ, 450 Mbps @ 2.4 GHZ Regional Compatibility N/A 20 dBm N/A 20 dBm Modem Model N/A 20 dBm S dBI @ 5 GHZ, 450 Mbps @ 2.4 GHZ S dBI @ 5 GHZ, 450 Mbps @ 2.4 GHZ Regional Compatibility N/A 20 dBm N/A 20 dBm ITE Category N/A S dBI @ 2.4 GHZ S dBI @ 2.4 GHZ S dBI @ 2.4 GHZ UTS/HSPA+ N/A CAT-12 C C S dBI @ 2.4 GHZ S dBI @ 2.4 GHZ<	Operating Temperature		32°-104°F	(0°-40°C)			
Nise Level Fanless 0 dBA Operating Altitude Up to 7400 ft (2250 m) Compliance FCC, ICES, CE, ROM, VCCI, BSMI, UL/cUL, CB Certifications US0v6/IPv6 Radio Specifications US0v6/IPv6 Muttiple (MU) MIMO N/A 3 x 3 Maximum Wi-Fi Speeds N/A 3 x 3 N/A 1300 Mbps @ 2.4 GHz 5 GHz, 450 Mbps @ 2.4 GHz Maximum TX Power N/A 20 dBm N/A 20 dBm Antenna Gain N/A 2.5 dBi @ 2.4 GHz N/A 3.5 dBi @ 2.4 GHz Regional Compatibility Ite Category N/A 3.5 dBi @ 2.4 GHz 5 dBi @ 2.4 GHz ITE Category N/A S.5 dBi @ 2.4 GHz S dBi @ 2.4 GHz 5 dBi @ 2.4 GHz ITE Category N/A S.5 dBi @ 2.4 GHz S dBi @ 2.4 GHz S dBi @ 2.4 GHz ITE Category N/A S dBi @ 2.4 GHz S dBi @ 2.4 GHz S dBi @ 2.4 GHz ITE Category N/A S dBi @ 2.4 GHz S dBi @ 2.4 GHz S dBi @ 2.4 GHz ITE Category N/A S dBi @ 2.4 GHz S dBi @ 2.4 G	Storage Temperature		-31°-158°F (-35°–70°C)			
Operating Altitude Up to 7400 ft. (2250 m.) Compliance FCC, ICES, CE, RCM, VCCI, BSMI, UL/cUL, CB Certifications USSVØ/IPv6 Ratios USSVØ/IPv6 Multiple (MU) MIMO N/A 3 × 3 Maximum W-Fi Speeds N/A 3 × 3 Maximum TX-Power N/A 2 × 3 Antenna Gain N/A 2 0 dBm N/A 2 0 dBm Regional Compatibility N/A 3 5 dBl © 5 CHZ, 450 Mbps © 2.4 GHz 5 dBl © 5 CHZ, 450 Mbps © 5 CHZ 6 CHZ Regiona N/A S dBl © 5 CH	Humidity		10%–90% non-	condensing			
Compliance FCC, ICES, CE, RCM, VCCI, BSMI, UL/cUL, CB Certifications USGV6///PV Radio Specifications N/A Multiple (MU) MIMO N/A 3 × 3 Maximum Wi-FI Speeds N/A 3 × 3 Maximum Wi-FI Speeds N/A 3 × 3 Maximum Wi-FI Speeds N/A 3 × 3 Maximum TX Power N/A 20 dBm N/A 20 dBm Antenna Gain N/A 20 dBm N/A 3 .5 dBi @ 5 GHz, 5 GHB @ 5 GHZ, 6 SGH @ 5 GHZ, 5 GHB	Noise Level	Fanless 0 dBA					
Certifications USGV6//IPv6 Radio Specifications N/A 3 × 3 Multiple (MU) MIMO N/A 3 × 3 N/A 3 × 3 Maximum Wi-Fi Speeds N/A 3 × 3 N/A 3 × 3 Maximum Wi-Fi Speeds N/A 2 × 3 1300 Mbps @ c. 5 GHz, 450 Mbps @ c. 4 GHz 5 GHz, 450 Mbps @ c. 4 GHz Maximum Tx Power N/A 2 0 dBm N/A 2 0 dBm Antenna Gain N/A 3.5 dBi @ 5 GHz, 5 dBi @ 2.4 GHz N/A 3.5 dBi @ 2.4 GHz Regional Compatibility N/A 3.5 dBi @ 2.4 GHz S dBi @ 2.4 GHz S dBi @ 2.4 GHz Mdem Model N/A S dBi @ 2.4 GHz S dBi @ 2.4 GHz S dBi @ 2.4 GHz ItE Category N/A S dBi @ 2.4 GHz S dBi @ 2.4 GHz S dBi @ 2.4 GHz UTTS/HSPA+ N/A S dBi @ 2.4 GHZ S dBi @ 2.4 GHZ S dBi @ 2.4 GHZ UTS/HSPA+ N/A S dBi @ 2.4 GHZ S dBi @ 2.4 GHZ S dBi @ 2.4 GHZ UTS/HSPA+ N/A B1, B2, B3, B4, B5, B7, B8, B9, B13 B1, B1, B1, B1, B1, B2, B4, B6, B4, B66, B4, B9, B19 S dBi @ 2.4 GHZ	Operating Altitude	Up to 7400 ft (2250 m)					
Radio Specifications Multiple (MU) MIMO N/A 3 × 3 N/A 3 × 3 Maximum Wi-Fi Speeds N/A 1300 Mbps @ 2.4 GHz N/A 1300 Mbps @ 2.4 GHz Maximum Tx Power N/A 2.0 dBm N/A 2.0 dBm Antenna Gain N/A 2.5 dBi @ 5GHz, 450 Mbps @ 2.4 GHz N/A 2.0 dBm Regional Compatibility N/A 2.5 dBi @ 5GHz, 5 dBi @ 5GHz, 5 dBi @ 5GHz, 5 dBi @ 5GHz, 5 dBi @ 2.4 GHz Sierra Wireless EM7565 (2 SIN Sots, Active/Passive) ILTE Category N/A All Regions All Regions My Sierra Wireless EM7565 (2 SIN Sots, Active/Passive) Sierra Wireless EM7565 (2 SIN Sots, Active/Passive) ILTE Category N/A CAT-12 Sierra Wireless EM7565 (2 SIN Sots, Active/Passive) UMTS/HSPA+ N/A B1, B2, B3, B4, B5, B7, B8, B9, B12, B13, B18, B19, B20, B20, B24, B29, B30, B32, B41, B42, B43, B46, B48, B66 Sign B32, B41, B42, B43, B46, B48, B66 UMTS/HSPA+ N/A - COMA 1xRT/FEV-DO Rev A - GSM/OPRS/EDCE N/A FCC, ICES, CE, RCM, VCCI, BSMI, UL/CUL, CB - Diversity N/A Yes Yes	Compliance	FCC, ICES, CE, RCM, VCCI, BSMI, UL/cUL, CB					
Multiple (MU) MIMON/A3 × 3Maximum Wi-Fi SpeedsN/A1300 Mbps @ 5 GHz, 450 Mbps @ 2.4 GHzN/A1300 Mbps @ 5 GHz, 450 Mbps @ 2.4 GHzMaximum Tx PowerN/A20 dBmN/A20 dBmAntenna GainN/A3.5 dBi @ 5GHz, 5 dBi @ 2.4 GHzN/A3.5 dBi @ 5GHz, 5 dBi @ 2.4 GHzRegional CompatibilitySilerra Wireless EM7565 (2 SIM Slots, Active/Passive)Silerra Wireless EM7565 	Certifications	USGv6/IPv6					
Maximum Wi-Fi SpeedsN/A1300 Mbps @ 5 GHz, 450 Mbps @ 2.4 GHzN/A1300 Mbps @ 5 GHz, 450 Mbps @ 2.4 GHzMaximum Tx PowerN/A20 dBmN/A20 dBmAntenna GainN/A20 dBmN/A2.0 dBmRegional CompatibilityImage: CompatibilityImage: CompatibilityImage: CompatibilityTE CategoryN/AAll RegionsAll RegionsUTS/HSPA+N/ASign B, B2, B4, B5, B7, B8, B9, B12, B13, B19, B20, B26, B28, B29, B20, B20, B26, B28, B20, B20, B20, B20, B20, B20, B20, B20	Radio Specifications						
S GHZ, 450 Mbps @ 2.4 GHz S GHZ, 450 Mbps @ 2.4 GHz Maximum Tx Power N/A 20 dBm N/A 20 dBm Antenna Gain N/A 20 dBm N/A 20 dBm Regional Compatibility K S dBi @ 2.4 GHz S dBi @ 2.4 GHz S dBi @ 2.4 GHz Regional Compatibility K All Regions All Regions S dBi @ 2.4 GHz	Multiple (MU) MIMO	N/A	3 × 3	N/A	3 × 3		
Antenna GainN/A3.5 dBi @ 5GHz, 5 dBi @ 2.4 GHzN/A3.5 dBi @ 5GHz, 5 dBi @ 2.4 GHzRegional CompatibilityN/AAll RegionsRegionsN/AAll RegionsModem ModelN/ASierra Wireless EM7565 (2 SIM Slots, Active/Passive)LTE CategoryN/ACAT-12LTE BandsN/AB1, B2, B3, B4, B5, B7, B8, B9, B12, B13, B18, B19, B20, B26, B28, B29, B30, B32, B41, B42, B43, B46, B48, B66UMTS/HSPA+N/AB1, B2, CAT-12CDMAN/AB1, B2, B3, B4, B5, B7, B8, B9, B12, B13, B18, B19, B20, B26, B28, B29, B30, B32, B41, B42, B43, B46, B48, B66OWTS/HSPA+N/AB1, B2, B3, B4, B5, B5, B5, B5, B9, B12, B13, B18, B19, B20, B26, B28, B29, B10, B20, B42, B43, B46, B48, B66ODMA 1xRT/EV-DO Rev AN/A-Godule CertificationsN/AFCC, ICES, CE, RCM, VCCI, BSMI, UL/cUL, CBDiversityN/AYesMIMON/AYes	Maximum Wi-Fi Speeds	N/A	1 0	N/A			
S GBI @ 2.4 GHz S G BI @ 2.4 GHz Regional Compatibility N/A All Regions Moder Model N/A All Regions Moder Model N/A Sigrar Wireless EM7565 (2 SIM Slots, Active/Passive) LTE Category N/A CAT-12 LTE Bands N/A Bl, B2, B3, B4, B5, B7, B8, B9, B12, B13, B8, B19, B20, B26, B28, B29, B19 UMTS/HSPA+ N/A B1, B2, D4, B5, B6, B8, B9, B19 CDMA 1xRT/EV-DORev A N/A - Model Certifications N/A FCC, ICES, CE, RCM, VCC, ISSM, UL/CUL, CB Diversity N/A Yes MIMO N/A Yes	Maximum Tx Power	N/A	20 dBm	N/A	20 dBm		
RegionsN/AAll RegionsModem ModelN/ASierra Wireless EM7565 (2 SIM Slots, Active/Passive)LTE CategoryN/ACAT-12LTE BandsN/AB1, B2, B3, B4, B5, B7, B8, B9, B12, B13, B18, B19, B20, B26, B28, B29, B30, B32, B41, B42, B43, B46, B48, B66UMTS/HSPA+N/AB1, B2, B3, B4, B5, B6, B8, B9, B19WCDMAN/AB1, B2, B4, B5, B6, B8, B9, B19CDMA 1xRTT/EV-D0 Rev AN/A-GSM/GPRS/EDGEN/A-Module CertificationsN/AFCC, ICES, CE, RCM, VCCI, BSMI, UL/CUL, CBDiversityN/AYes	Antenna Gain	N/A		N/A			
Modem ModelN/ASierra Wire's EM7565 (2 SIM Slots, Active/Passive)LTE CategoryN/ACAT-12LTE BandsN/AB1, B2, B3, B4, B5, B7, B8, B9, B12, B13, B18, B19, B20, B26, B28, B29, B30, B32, B41, B42, B43, B46, B48, B66UMTS/HSPA+N/AB1, B2, B4, B5, B6, B8, B9, B19WCDMAN/AB1, B2, B4, B5, B6, B8, B9, B19CDMA 1xRTT/EV-DO Rev AN/A-GSM/GPRS/EDGEN/A-Module CertificationsN/AFCC, ICES, CE, RCM, VCCI, BSMI, UL/cUL, CBDiversityN/AYes	Regional Compatibility						
LTE Category N/A CAT-12 LTE Bands N/A B1, B2, B3, B4, B5, B7, B8, B9, B12, B13, B18, B19, B20, B26, B28, B29, B20, B32, B41, B42, B43, B46, B48, B66 UMTS/HSPA+ N/A B1, B2, D3, B4, B5, B7, B8, B9, B12, B13, B18, B19, B20, B26, B28, B29, B19 VCDMA N/A B1, B2, B4, B5, B6, B8, B9, B19 CDMA 1xRTT/EV-DO Rev A N/A - GSM/GPRS/EDGE N/A - Module Certifications N/A FCC, ICES, CE, RCM, VCCI, BSMI, UL/CUL, CB MIMO N/A Yes	Regions	I	N/A	All Re	egions		
LTE Bands N/A B1, B2, B3, B4, B5, B7, B8, B9, B12, B13, B18, B19, B20, B26, B28, B29, B30, B32, B41, B42, B43, B46, B48, B66 UMTS/HSPA+ N/A B1, B2, B3, B4, B5, B7, B8, B9, B12, B13, B18, B19, B20, B26, B28, B29, B30, B32, B41, B42, B43, B46, B48, B66 WCDMA N/A B1, B2, B4, B5, B6, B8, B9, B19 WCDMA N/A - CDMA 1xRTT/EV-D0 Rev A N/A - GSM/GPRS/EDGE N/A - Module Certifications N/A FCC, ICES, CE, RCM, VCCI, BSMI, UL/cUL, CB Diversity N/A Yes MIMO N/A Yes	Modem Model						
UMTS/HSPA+N/AB1, B2, B4, B4, B4, B4, B4, B6, B4, B66WCDMAN/AB1, B2, B4, B5, B6, B8, B9, B19CDMA 1xRTT/EV-DO Rev AN/A-GSM/GPRS/EDGEN/A-Module CertificationsN/AFCC, ICES, CE, RCM, VCCI, BSMI, UL/cUL, CBDiversityN/AYesMIMON/AYes	LTE Category	I	N/A	CA	T-12		
WCDMA N/A - CDMA 1xRTT/EV-DO Rev A N/A - GSM/GPRS/EDGE N/A - Module Certifications N/A FCC, ICES, CE, RCM, VCCI, BSMI, UL/CUL, CB Diversity N/A Yes MIMO Yes	LTE Bands						
CDMA 1xRTT/EV-DO Rev A N/A - GSM/GPRS/EDGE N/A - Module Certifications N/A FCC, ICES, CE, RCM, VCCI, BSMI, UL/CUL, CB Diversity N/A Yes MIMO N/A Yes	UMTS/HSPA+		N/A	B1, B2, B4, B5,	B6, B8, B9, B19		
GSM/GPRS/EDGE N/A - Module Certifications N/A FCC, ICES, CE, RCM, VCCI, BSMI, UL/cUL, CB Diversity N/A Yes MIMO N/A Yes	WCDMA	l	N/A		-		
Module Certifications N/A FCC, ICES, CE, RCM, VCCI, BSMI, UL/cUL, CB Diversity N/A Yes MIMO Yes	CDMA 1xRTT/EV-DO Rev A		N/A		-		
Diversity N/A Yes MIMO N/A Yes	GSM/GPRS/EDGE		N/A		-		
MIMO N/A Yes	Module Certifications		N/A	FCC, ICES, CE, RCM, VCCI, BSMI, UL/cUL, CB			
	Diversity	l	N/A	Y	Yes		
GNSS Bias N/A Yes	МІМО	N/A		Yes			
	GNSS Bias	l	N/A	Y	es		

Subscriptions

			Bundles			
Service Category	Service Offering	A-la-carte	Enterprise Protection	Unified Threat Protection	Advanced Threat Protection	
FortiGuard Security	IPS Service	•	•		•	
Services	Anti-Malware Protection (AMP) — Antivirus, Mobile Malware, Botnet, CDR, Virus Outbreak Protection and FortiSandbox Cloud Service	•	•	•	٠	
	URL, DNS & Video Filtering Service	•	•	•		
	Anti-Spam		•	•		
	Al-based Inline Malware Prevention Service	•	•			
	Data Loss Prevention Service ¹	•	•			
	OT Security Service (OT Detection, OT Vulnerability correlation, Virtual Patching, OT Signature / Protocol Decoders) ¹	٠				
	Application Control		included with FortiCare Subscription			
	CASB SaaS Control		included with FortiCare Subscription			
SD-WAN and SASE Services	SD-WAN Underlay Bandwidth and Quality Monitoring Service	•				
Services	SD-WAN Overlay-as-a-Service for SaaS-based overlay network provisioning	•				
	SD-WAN Connector for FortiSASE Secure Private Access	•				
	FortiSASE subscription including cloud management and 10Mbps bandwidth license ²	•				
NOC and SOC Services	FortiGuard Attack Surface Security Service (IoT Detection, IoT Vulnerability Correlation, and Security Rating Updates) ¹	•	•			
	FortiConverter Service	•	•			
	Managed FortiGate Service	•				
	FortiGate Cloud (SMB Logging + Cloud Management)	•				
	FortiAnalyzer Cloud	•				
	FortiAnalyzer Cloud with SOCaaS	•				
	FortiGuard SOCaaS	•				
Hardware and	FortiCare Essentials	•				
Software Support	FortiCare Premium	•	•	•	•	
	FortiCare Elite	•				
Base Services	Internet Service (SaaS) DB Updates					
	GeoIP DB Updates		included with FortiCare Subscription			
	Device/OS Detection Signatures					
	Trusted Certificate DB Updates					
	DDNS (v4/v6) Service					

Full features available when running FortiOS 7.4.1
Desktop Models only



FortiGuard Bundles

FortiGuard Labs delivers a number of security intelligence services to augment the FortiGate firewall platform. You can easily optimize the protection capabilities of your FortiGate with one of these FortiGuard Bundles.

FortiCare Elite

FortiCare Elite offers enhanced SLAs and quick issue resolution through a dedicated support team. It provides single-touch ticket handling, extended Extended End-of-Engineering-Support for 18 months, and access to the new FortiCare Elite Portal for a unified view of device and security health.


Ordering Information

Product	SKU	Description
FortiGate 40F	FG-40F	5 x GE RJ45 ports (including 4 x Internal Ports, 1 x WAN Ports).
FortiWiFi 40F	FWF-40F-[RC]	5 x GE RJ45 ports (including 4 x Internal Ports, 1 x WAN Ports), Wireless (802.11a/b/g/n/ac-W2).
FortiGate 40F-3G4G	FG-40F-3G4G	5 x GE RJ45 ports (Including 1 x WAN port, 4 x Switch ports) with Embedded 3G/4G/LTE wireless wan module, external SMA WWAN antennas included.
FortiWiFi 40F-3G4G	FWF-40F-3G4G-[RC]	5 x GE RJ45 ports (Including 1 x WAN port, 4 x Switch ports) with Embedded 3G/4G/LTE wireless wan module, Wireless (802.11a/b/g/n/ac- W2), external SMA WWAN and wireless antennas included.
Optional Accessories		
Rack Mount Tray	SP-RACKTRAY-02	Rack mount tray for all FortiGate E series and F series desktop models are backwards compatible with SP-RackTray-01. For list of compatible FortiGate products, visit our Documentation website, docs.fortinet.com
AC Power Adaptor	SP-FG-40F-PA-10(-XX)	Pack of 10 AC power adaptors for FG/FWF-40F, come with interchangeable power plugs. (XX=various countries code).
Wall Mount Kits	SP-FG60F-MOUNT-20	Pack of 20 wall mount kits for FG/FWF-40F series, FG/FWF-60F series, FG-80F, FG-81F and FG-80F-Bypass.

[RC] = regional code: A, B, D, E, F, I, J, N, P, S, V, and Y

Fortinet CSR Policy

Fortinet is committed to driving progress and sustainability for all through cybersecurity, with respect for human rights and ethical business practices, making possible a digital world you can always trust. You represent and warrant to Fortinet that you will not use Fortinet's products and services to engage in, or support in any way, violations or abuses of human rights, including those involving illegal censorship, surveillance, detention, or excessive use of force. Users of Fortinet products are required to comply with the Fortinet EULA and report any suspected violations of the EULA via the procedures outlined in the Fortinet Whistleblower Policy.

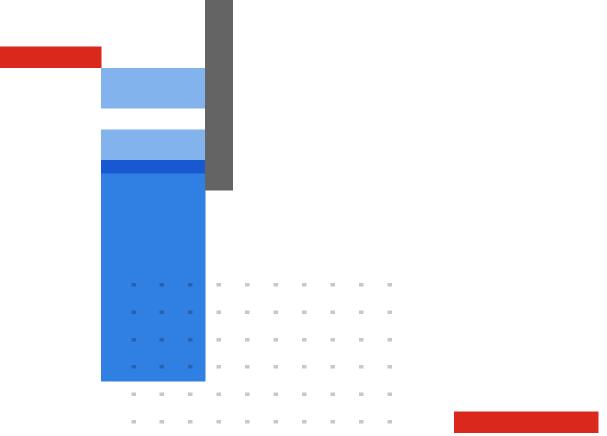

F: RTINET.

www.fortinet.com

Copyright © 2023 Fortinet, Inc. All rights reserved. Fortinet*, FortiGate*, FortiCare* and FortiGate*, FortiCare* and FortiGate*, FortiCare* and Certain other marks are registered trademarks of Fortinet, Inc., and other Fortinet names herein may also be registered and/or common law trademarks of Fortinet. All other product or company names may be trademarks of their respective owners. Performance and other metrics contained herein were attained in internal lab tests under ideal conditions, and actual performance and other results. Nothing metric perspective commitment by Fortinet, and Fortinet disclaims all warranties, whether express or implied, except to the extent Fortine tenters a binding written contract, signal by Fortinet. Soluties and uncertainties, whether express or implied, except to the extent Fortine tenters a binding written contract, signal by Fortinet. Soluties and in such averna, only the specific performance metrics expressly identified performance metrics and, in such event, only the specific performance metrics expressly identified performance in the same ideal conditions as in Fortinet's internal lab tests. Fortinet disclaims in full any covenants, representations, and guarantees pursuant hereto, whether express or implied. Fortinet reserves the right to change, modify, transfer, or otherwise revise this publication without notice, and the most current version of the publication shall be applicable.